




BALL VALVE

Full Bore - Screwed end

442096

210 bar

No	Part	Material
1	Body	Stainless steel SS316
2	Ball	Stainless steel SS316
3	Seatring	Delrin
4	Stem	Stainless steel SS316
5	Lever	Stainless steel SS304
6	Stem packing	PTFE
7		
8		
9		
10		

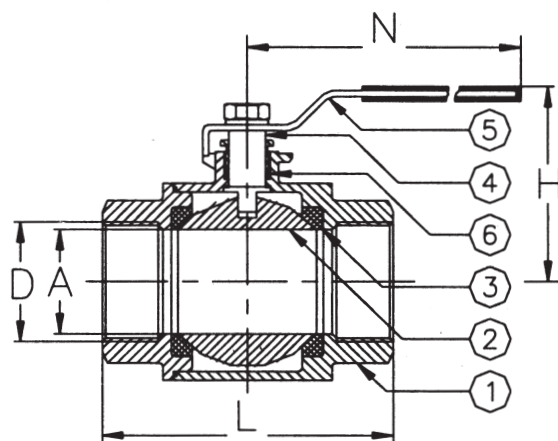

Variants:

Seatring Carbon filled PTFE

Other dimensions/materials on request

DN	D	A		N	L	H	Max working-pressure		Weight Kg
8	1/4"	11,6		100	60	41			0,4
10	3/8"	12,7		100	60	41			0,4
15	1/2"	15,0		108	67	47			0,5
20	3/4"	20,0		108	75	51			0,7
25	1"	25,4		146	100	57			1,3
32	1 1/4"	32,0		146	113	62			1,8
40	1 1/2"	38,0		178	122	73			2,6
50	2"	50,8		178	140	81			4,5