




BALL VALVE

Full Bore - Screwed end

540066

PN 210

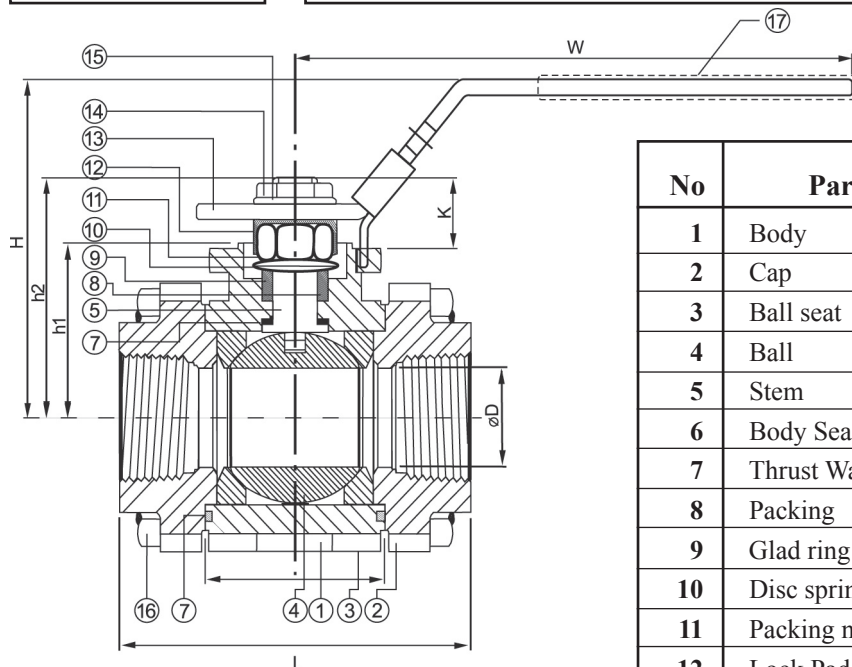

Variants:

Various actuators
Seating Carbon filled PTFE

Other dimensions/materials on request

No	Part	Material
1	Body	Cast Steel GSC25
2	Cap	Cast Steel GSC25
3	Ball seat	ATFE/PEEK
4	Ball	Stainless steel SS316
5	Stem	Stainless steel SS316
6	Body Seal	RTFE/GRAPHITE
7	Thrust Washer	
8	Packing	
9	Glad ring	AISI 304
10	Disc spring	AISI 301
11	Packing nut	AISI 304
12	Lock Pad	
13	Handle	
14	Handle nut	
15	Spring Washer	
16	Bolt	

DN	D	L	H	K			Max working-pressure		Weight Kg
8	14,3	74,8	45	15,3					0,7
10	14,3	74,8	45	15,3					0,9
15	14,3	74,8	49	15,3					1,5
20	20,7	80	52	16,8					1,9
25	25,4	93,1	72	17					2,4
32	31,5	109,5	78	29,6					2,8
40	38,0	120	86	29,6					3,4
50	50,8	139,6	95	29,6					5,0