




SAFETY VALVE

475693

PN 25

No	Part	Material
1	Body	Stainless steel (DIN-1.4408)
2	Cap	Stainless steel (DIN-1.4305/1.4408)
3	Coupling	Stainless steel (DIN-1.4401/1.4408)
4	Lead	Stainless steel (DIN-1.4408)
5	Washer	Stainless steel (DIN-1.4401)
6	Clip	Stainless steel (DIN-1.4310)
7	Hollow screw	Stainless steel (DIN-1.4305)
8	Hollow screw nut	Stainless steel (DIN-1.4305)
9	Spring press	Stainless steel (DIN-1.4301)
10	Cap	Asbestos free
11	Spring	Stainless steel (DIN-1.4300)
13	Scerwed seat	Stainless steel (DIN-1.4408)
15	Body coupling	PTFE
17	Rod	Stainless steel (DIN-1.4301)
18	Hood coupling	PTFE

Operating conditions:
max.temp in 250 C°
min.temp in -60 C°

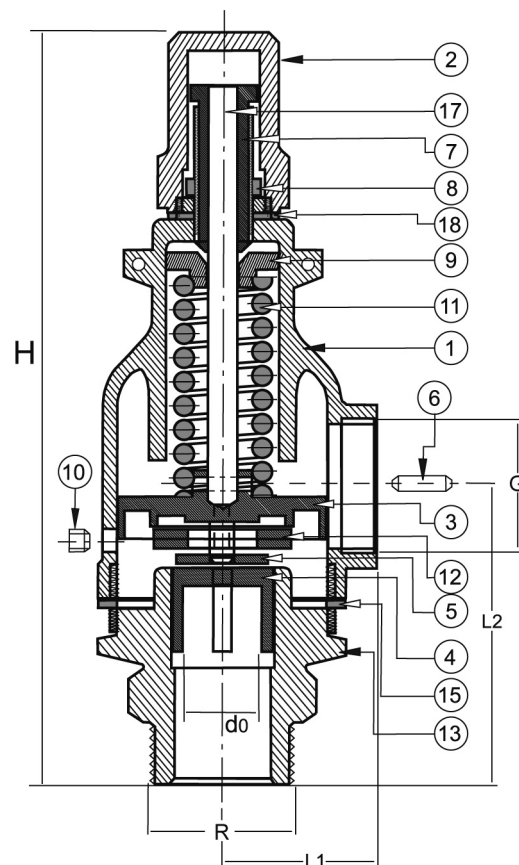

DN	RxG	do		H	L1	L2	Max working-pressure		Weight Kg
							Air Mpa	Air Mpa	
8	1/4"x1/4"	10,2		129	30	43	2,5		0,46
10	3/8"x3/8"	10,2		129	30	43	2,5		0,45
15	1/2"x1/2"	16,2		140	32	52	2,5		0,62
20	3/4"x3/4"	20,8		158	35	61	2,5		0,84
25	1"x1"	25,2		181	38	72	2,5		1,20
32	1,1/4"x1,1/4"	32,2		212	44	80	2,5		1,80
40	1,1/2"x1,1/2"	38,2		247	55	91	2,5		3,00
50	2"x2"	45,2		315	70	110	2,5		5,30
65	2,1/2"x2,1/2"	60,2		349	75	125	2,5		6,00
80	3"x3"	75,2		415	90	136	2,5		8,70
100	4"x4"	95,2		483	105	163	2,5		24,00