





BALL VALVE

Full Bore - Screwed end

442095

PN 64

No	Part	Material
1	Body	Stainless steel SS316
2	Ball	Stainless steel SS316
3	Seatring	PTFE 15% glasfibre
4	Stem	Stainless steel SS316
5	Lever	Stainless steel SS304
6	Stem packing	PTFE
7		
8		
9		
10		

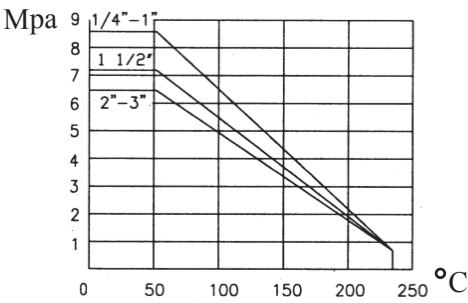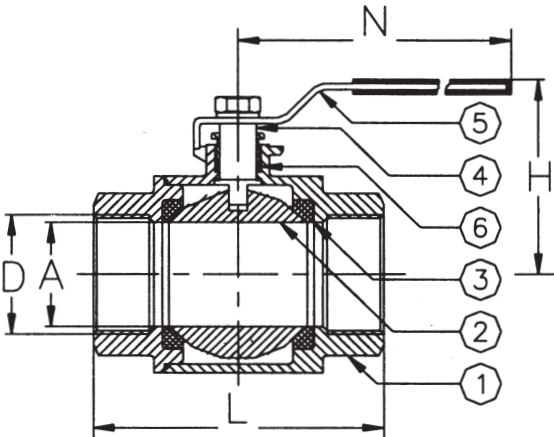

Variants:

Seatring Carbon filled PTFE

Other dimensions/materials on request

DN	D	A		N	L	H	Max working-pressure		Weight Kg
8	1/4"	10		120	55	64			0,3
10	3/8"	12		120	60	64			0,3
15	1/2"	15		120	75	66			0,3
20	3/4"	20		130	80	66			0,6
25	1"	25		155	90	80			1,1
32	1 1/4"	32		155	110	86			1,6
40	1 1/2"	38		185	119	97			2,3
50	2"	50		185	140	105			3,8
65	2 1/2"	63		250	185	146			6,8
80	3"	76		250	205	155			11,6
100	4"	100		280	240	175			11,6