




BALL VALVE

Full Bore - Screwed end

443024

PN 25

No	Part	Material
1	Body	Bronze Rg5
2	Ball	Brass, Hardchrome
3	Seatring	PTFE
4	Stem packing	PTFE
5	Gland	Brass
6	Stem	Brass
7	Lever DN8-50	Steel, zinkplated
8	Lever DN65-100	Steel, zinkplated
9		
10		

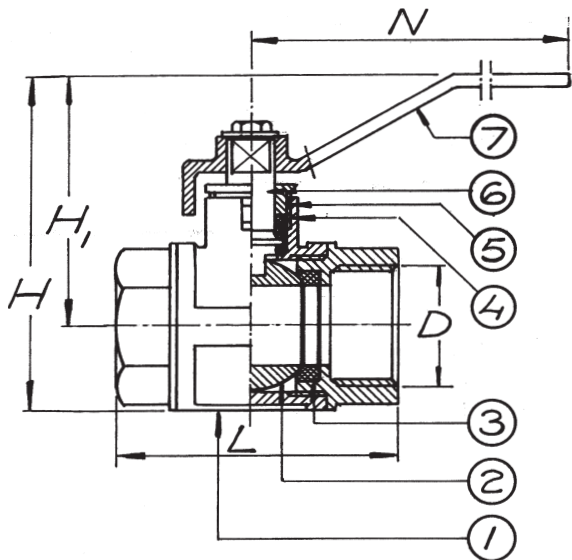

Variants:
 Seating Carbon filled PTFE

Other dimensions/materials on request

DN	D		N	L	H1	H	Max working-pressure		Weight Kg
							Mpa 100 °C	Mpa 185 °C	
8	1/4"		88	51	41	55	2,5	2,0	0,2
10	3/8"		88	51	41	56	2,5	2,0	0,2
15	1/2"		88	62	43	60	2,5	2,0	0,3
20	3/4"		105	70	50	67	2,5	2,0	0,4
25	1"		105	85	55	78	2,5	2,0	0,7
32	1 1/4"		140	100	70	105	2,5	2,0	1,1
40	1 1/2"		140	110	85	120	2,5	2,0	1,4
50	2"		155	134	96	140	2,5	2,0	2,4
65	2 1/2"		200	142	120	175	2,5	2,0	3,3
80	3"		285	180	134	197	2,5	2,0	3,7
100	4"		285	210	147	175	2,5	2,0	4,5