



BALL VALVE

Full Bore - Flanged end



445162

PN 16

No	Part	Material
1	Body	Cast steel GSC25
2	Ball	Stainless steel SS304
3	Seatring	PTFE
4	Stem	Stainless steel SS304
5	Stem packing	PTFE
6	Lever	Cast iron
7		
8		
9		
10		

Variants:
 Various actuators
 Seatring Carbon filled PTFE

Other dimensions/materials on request

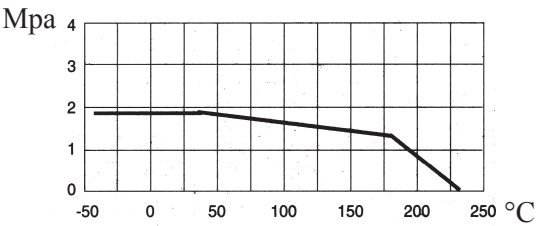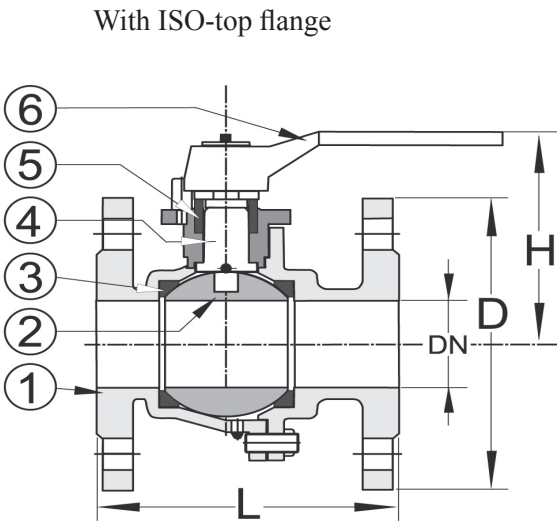

DN	D	n	Hcd	d	L	H	Max working-pressure		Weight Kg
15	95	4	60	14	115	84			1,8
20	105	4	75	14	120	84			2,6
25	115	4	85	14	125	93			4,0
32	140	4	100	18	130	102			5,3
40	150	4	110	18	140	135			6,2
50	165	4	125	18	150	145			9,0
65	185	4	145	18	170	174			13,5
80	200	8	160	18	180	188			17,2
100	220	8	180	18	190	203			24,0
125	250	8	210	18	325	247			46,0
150	285	8	240	22	350	261			60,0
200	340	8	295	22	400	400			150,0
250	395	12	350	22	450	450			210,0