



3-WAY BALL VALVE



Screwed end

448095

PN 40

No	Part	Material
1	Body	Stainless steel SS316
2	Ball	Stainless steel SS316
3	Seat ring	PTFE 15% glasfibre
4	Stem	Stainless steel SS316
5	Stem packing	PTFE
6	Lever	Stainless steel SS304

Variants:
 Ball design L-port
 Ball design T-port
 Various actuators
 Seatrings Carbon filled PTFE
 Other dimensions/materials on request

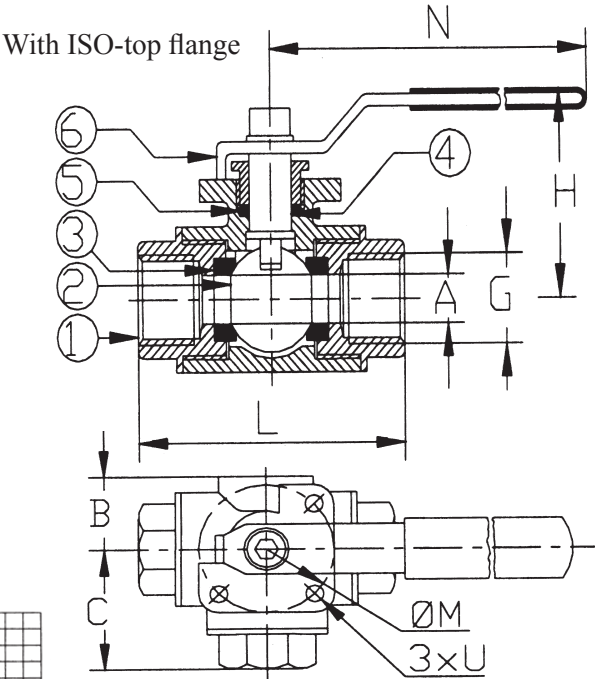

DN	G	A	B	C	L	H	Max working-pressure		Weight Kg
8	1/4"	9,5	22	39,5	79	63			0,8
10	3/8"	9,5	22	39,5	79	63			0,8
15	1/2"	12,0	22	39,5	79	63			0,8
20	3/4"	15,0	28	44,0	88	75			1,2
25	1"	20,0	31	54,0	108	82			1,7
32	1 1/4"	25,0	34	62,0	108	89			2,8
40	1 1/2"	32,0	40	67,5	135	90			4,0
50	2"	40,0	48	82,0	164	100			6,8