



BALL VALVE

Full Bore



Long Butt weld end

440695

PN 64

No	Part	Material
1	Body	Stainless steel SS316
2		
3	Ball	Stainless steel SS316
4	Seatring	PTFE 15% glasfibre
5	Bolt	Stainless steel SS304
6	Stem packing	PTFE
7	Stem	Stainless steel SS316
8	Lever	Stainless steel SS304
9	Butt weld end	Stainless steel SS316
10		

With ISO-top flange

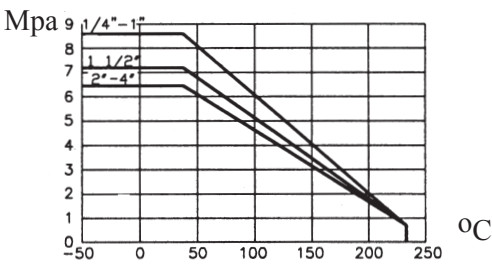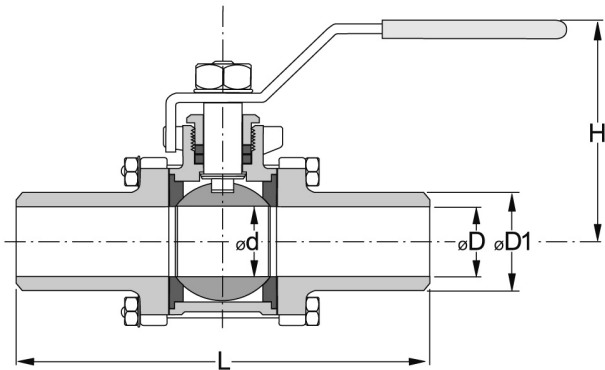

Variants:
 Various actuators
 Seatring Carbon filled PTFE
 Other dimensions/materials on request

DN	D	D1	d		L	H	Max working-pressure		Weight Kg
8	11,6	15,2	11,6		225	45			0,7
10	12,7	17,2	12,7		225	45			0,9
15	15,0	21,3	15,0		225	49			1,5
20	20,0	26,9	20,0		225	52			1,9
25	25,4	34,5	25,4		255	72			2,4
32	32,0	43,5	32,0		255	78			2,8
40	38,0	50,0	38,0		260	86			3,4
50	50,0	61,5	50,0		275	95			5,0
65	65,0	77,0	65,0		334	130			9,1
80	80,0	90,0	80,0		334	142			14,8
100	100,0	115,0	100,0		365	173			21,4