




STOP VALVE

467002

PN 16

No	Part	Material
1	Body	Nodular Cast iron GGG40.3
2	Bonnet	Nodular Cast iron GGG40.3
3	Seat ring	Bronze Rg5
4	Disc	Bronze Rg5
5	Stem	Special brass
6	Handwheel	Cast iron
7	Glandpacking	Graphite
8	Gland	Nodular Cast iron GGG40.3
9	Gasket	Teadit
10	Bolt/Nut	Steel, zincplated

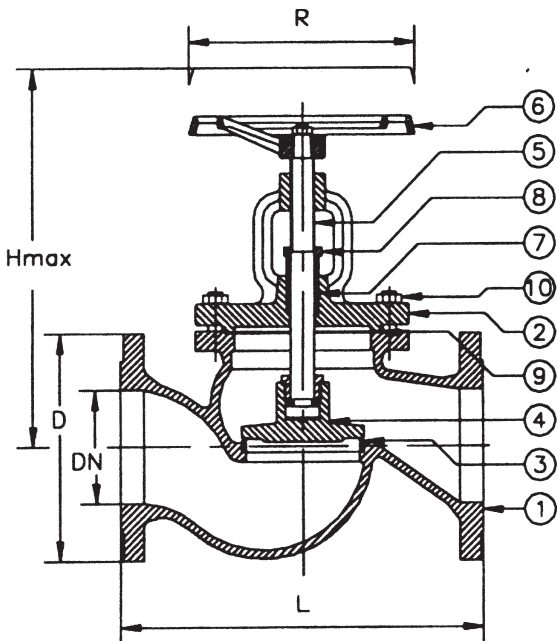

Variants:

- S.D.N.R. = Non-return disc
- R = Parabolic disc
- SS = Stainless steel trim
- Various actuators
- Other dimensions/materials on request

DN	D	n	Hcd	d	L	Hmax	Max working-pressure		Weight Kg
							Mpa 120 °C	Mpa 225 °C	
15	95	4	65	14	130	189	1,6	1,0	3,5
20	105	4	75	14	150	189	1,6	1,0	4,0
25	115	4	85	14	160	203	1,6	1,0	5,0
32	140	4	100	18	180	216	1,6	1,0	6,8
40	150	4	110	18	200	246	1,6	1,0	9,3
50	165	4	125	18	230	259	1,6	1,0	12,2
65	185	4	145	18	290	313	1,6	1,0	18,0
80	200	8	160	18	310	317	1,6	1,0	25,0
100	220	8	180	18	350	381	1,6	1,0	35,0
125	250	8	210	18	400	452	1,6	1,0	55,0
150	285	8	240	22	480	476	1,6	1,0	77,0
200	340	8	295	22	600	643	1,0	0,6	145,0
250	395	12	350	22	730	780	1,0	0,6	243,0
300	445	12	400	22	850	890	1,0	0,6	341,0