




STOP VALVE

467064

PN 40

No	Part	Material
1	Body	Cast steel GSC25
2	Bonnet	Cast steel GSC25
3	Seat ring	Stainless steel 1.4301
4	Disc	Stainless steel X20Cr13
5	Stem	Stainless steel X20Cr13
6	Handwheel	Cast iron
7	Glandpacking	Graphite
8	Gland	Cast steel GSC25
9	Gasket	Teadit
10	Bolt/Nut	Steel, zincplated

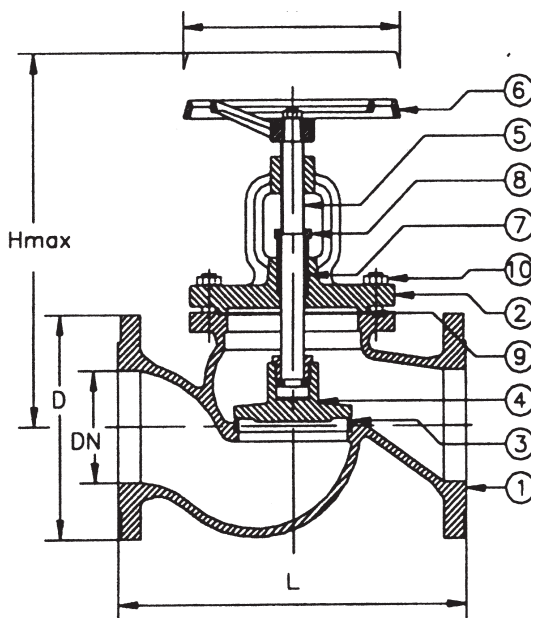

Variants:

S.D.N.R. = Non-return dis
R = Parabolic disc

Various actuators
Other dimensions/materials on request

DN	D	n	Hcd	d	L	Hmax	Max working-pressure		Weight Kg
							Mpa 120 °C	Mpa 400 °C	
15	95	4	65	14	130	189	4,0	2,1	5,2
20	105	4	75	14	150	189	4,0	2,1	5,8
25	115	4	85	14	160	203	4,0	2,1	7,6
32	140	4	100	18	180	216	4,0	2,1	9,0
40	150	4	110	18	200	246	4,0	2,1	13,1
50	165	4	125	18	230	259	4,0	2,1	15,1
65	185	8	145	18	290	313	4,0	2,1	26,0
80	200	8	160	18	310	317	4,0	2,1	33,0
100	235	8	190	22	350	381	4,0	2,1	44,0
125	270	8	220	26	400	452	4,0	2,1	71,0
150	300	8	250	26	480	476	4,0	2,1	100,0
200	360	12	310	26	600	643	2,5	1,3	170,0
250	425	12	370	30	730	780	2,5	1,3	283,0
300	485	12	430	30	850	890	2,5	1,3	414,0