



STOP VALVE

467164

PN 40

No	Part	Material
1	Body	Cast steel GSC25
2	Bonnet	Cast steel GSC25
3	Seat ring	Stainless steel 1.4301
4	Disc	Stainless steel X20Cr13
5	Stem	Stainless steel X20Cr13
6	Handwheel	Cast iron
7	Glandpacking	Graphite
8	Gland	Cast steel GSC25
9	Gasket	Graphite
10	Bolt/Nut	Steel, zincplated


Variants:

S.D.N.R. = Non-return disc

R = Parabolic disc

Various actuators

Other dimensions/materials on request

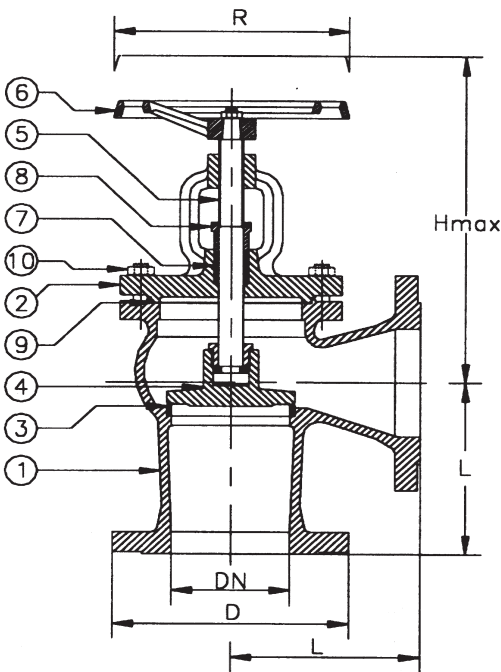

DN	D	n	Hcd	d	L	Hmax	Max working-pressure		Weight Kg
							Mpa 120 °C	Mpa 400 °C	
15	95	4	65	14	90	189	4,0	2,1	5,6
20	105	4	75	14	95	189	4,0	2,1	7,6
25	115	4	85	14	100	203	4,0	2,1	7,9
32	140	4	100	18	105	216	4,0	2,1	8,9
40	150	4	110	18	115	246	4,0	2,1	13,4
50	165	4	125	18	125	259	4,0	2,1	14,4
65	185	8	145	18	145	313	4,0	2,1	24,0
80	200	8	160	18	155	317	4,0	2,1	29,0
100	235	8	190	22	175	381	4,0	2,1	44,0
125	270	8	220	26	200	452	4,0	2,1	59,0
150	300	8	250	26	225	476	4,0	2,1	85,0
200	360	12	310	26	275	643	2,5	1,3	148,0
250	425	12	370	30	325	780	2,5	1,3	188,0
300	485	16	430	30	375	890	2,5	1,3	328,0