




STOP VALVE

468065

PN 64

No	Part	Material
1	Body	Cast steel GSC25
2	Bonnet	Cast steel GSC25
3	Seat ring	Stainless steel 1.4301
4	Disc	Stainless steel X20Cr13
5	Stem	Stainless steel X20Cr13
6	Handwheel	Cast iron
7	Glandpacking	Graphite
8	Gland	Cast steel GSC25
9	Gasket	Graphite
10	Bolt/Nut	Steel, zincplated

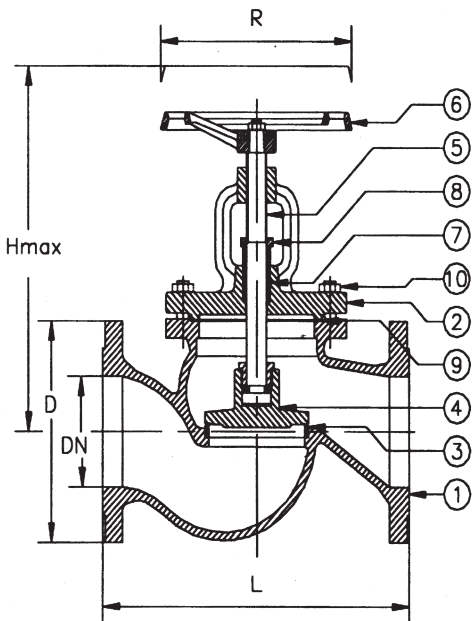

Variants:

S.D.N.R. = Non-return disc

R = Parabolic disc

Various actuators

Other dimensions/materials on request

DN	D	n	Hcd	d	L	Hmax	Max working-pressure		Weight Kg
							Mpa 120 °C	Mpa 400 °C	
15	105	4	75	14	210	250	6,4	2,7	10,0
20	130	4	90	18	230	310	6,4	2,7	11,0
25	140	4	100	18	230	310	6,4	2,7	12,0
32	155	4	110	22	260	330	6,4	2,7	23,0
40	170	4	125	22	260	350	6,4	2,7	24,0
50	180	4	135	22	300	380	6,4	2,7	30,0
65	205	8	160	22	340	410	6,4	2,7	48,0
80	215	8	170	22	380	460	6,4	2,7	60,0
100	250	8	200	26	430	490	6,4	2,7	99,0
125	295	8	240	30	500	550	6,4	2,7	130,0
150	295	8	280	33	550	610	6,4	2,7	180,0