




SWING CHECK VALVE

370264

PN 40

No	Part	Material
1	Body	Cast steel GSC25
2	Seat, body	Stainless steel SS304
3	Disc	Cast steel GSC25
4	Disc seat	Stainless steel SS304
5	Hinge	Cast steel GSC25
6	Hinge pin	Stainless steel SS420
7	Bonnet	Cast steel GSC25
8		
9		
10		

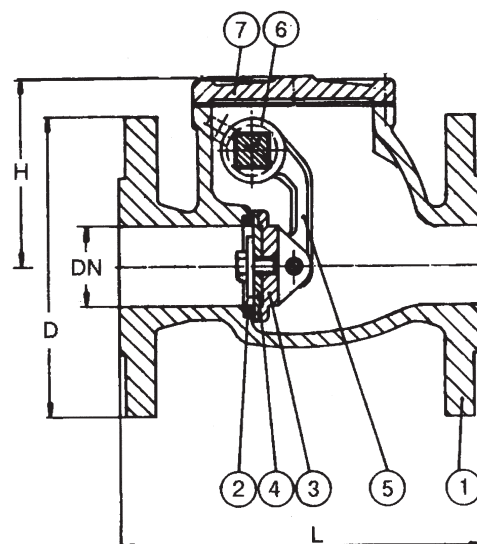

Variants:

With counterweight

Other dimensions/materials on request

DN	D	n	Hcd	d	L	H	Max working-pressure		Weight Kg
							Mpa 120 °C	Mpa 300 °C	
40	150	4	110	18	180	95	4,0	2,1	21,0
50	165	4	125	18	200	100	4,0	2,1	24,0
65	185	4	145	18	240	115	4,0	2,1	33,0
80	200	8	160	18	260	135	4,0	2,1	34,0
100	235	8	190	22	300	145	4,0	2,1	38,0
125	270	8	220	26	350	160	4,0	2,1	53,0
150	300	8	250	26	400	180	4,0	2,1	66,0
200	360	12	310	26	500	270	2,5	1,3	185,0
250	425	12	370	30	600	320	2,5	1,3	221,0
300	485	16	430	30	700	350	2,5	1,3	369,0
350	555	16	490	33	800	435	2,5	1,3	497,0
400	620	16	550	36	900	475	2,5	1,3	626,0