




MUD BOX

482051

PN 4

No	Part	Material
1	Body	Cast iron GG25
2	Bonnet	Cast iron GG25
3	Strainer	Stainless steel SS316
4	Gasket	Perbunan-rubber
5	Plug	Brass
6		
7		
8		
9		
10		

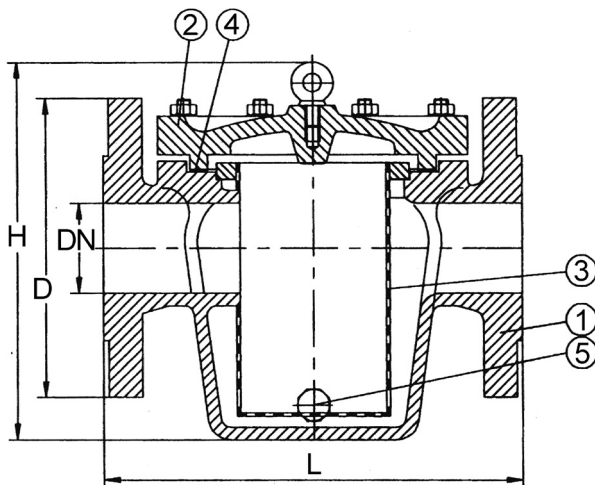

Variants:
 Other mesh-sizes
 With test valve

Flanges drilled according to PN10

Standard Mesh-size:
 DN 40- 65 5x5 mm
 DN 80-500 8x8 mm

Other dimensions/materials on request

DN	D	n	Hcd	d	L	H	Max working-pressure Mpa		Weight Kg
							Mpa 80 °C		
40	150	4	110	18	200	205	0,4		11,0
50	165	4	125	18	230	225	0,4		15,0
65	185	4	145	18	290	260	0,4		21,0
80	200	8	160	18	310	310	0,4		27,0
100	220	8	180	18	350	345	0,4		37,0
125	250	8	210	18	400	395	0,4		50,0
150	285	8	240	22	480	465	0,4		71,0
200	340	8	295	22	600	565	0,4		122,0
250	395	12	350	22	600	610	0,4		148,0
300	445	12	400	22	600/700	675	0,4		190,0
350	505	16	460	22	610	790	0,4		230,0
350	505	16	460	22	690/800	790	0,4		260,0
400	565	16	515	26	740	990	0,4		345,0
450	670	20	565	26	1000	1215	0,4		662,0