




# STOP VALVE

458932

PN 16

| No | Part          | Material           |
|----|---------------|--------------------|
| 1  | Body          | Bronze Rg10        |
| 2  | Disc          | Bronze Rg10        |
| 3  | Disc nut      | Special brass      |
| 4  | Bonnet        | Bronze Rg10        |
| 5  | Stud bolt/nut | St. zink-pl./Brass |
| 6  | Gland         | Bronze Rg10        |
| 7  | Stem          | Special brass      |
| 8  | Handwheel     | Cast iron          |
| 9  |               |                    |
| 10 |               |                    |

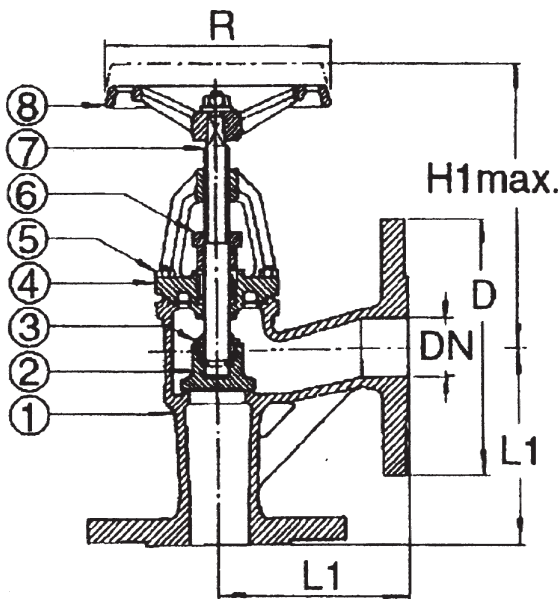

### Variants:

S.D.N.R. = Non-return disc

R = Parabolic disc

Other dimensions/materials on request (available up to DN600mm)

| DN  | D   | n  | Hcd | d  | L1  | Hmax | Max working-pressure |               | Weight<br>Kg |
|-----|-----|----|-----|----|-----|------|----------------------|---------------|--------------|
|     |     |    |     |    |     |      | Mpa<br>100 C°        | Mpa<br>225 C° |              |
| 15  | 95  | 4  | 65  | 14 | 90  | 160  | 1,6                  | 1,1           | 3,0          |
| 20  | 105 | 4  | 75  | 14 | 95  | 160  | 1,6                  | 1,1           | 3,5          |
| 25  | 115 | 4  | 85  | 14 | 100 | 175  | 1,6                  | 1,1           | 4,1          |
| 32  | 140 | 4  | 100 | 18 | 105 | 175  | 1,6                  | 1,1           | 5,7          |
| 40  | 150 | 4  | 110 | 18 | 115 | 210  | 1,6                  | 1,1           | 7,5          |
| 50  | 165 | 4  | 125 | 18 | 125 | 215  | 1,6                  | 1,1           | 9,6          |
| 65  | 185 | 4  | 145 | 18 | 145 | 235  | 1,6                  | 1,1           | 14,0         |
| 80  | 200 | 8  | 160 | 18 | 155 | 275  | 1,6                  | 1,1           | 20,0         |
| 100 | 220 | 8  | 180 | 18 | 175 | 325  | 1,6                  | 1,1           | 27,0         |
| 125 | 250 | 8  | 210 | 18 | 200 | 360  | 1,6                  | 1,1           | 40,0         |
| 150 | 285 | 8  | 240 | 22 | 225 | 405  | 1,6                  | 1,1           | 57,0         |
| 200 | 340 | 8  | 295 | 22 | 275 | 600  | 1,6                  | 0,65          | 142,0        |
| 250 | 395 | 12 | 350 | 22 | 325 | 660  | 0,40                 | 0,40          | 205,0        |
| 300 | 445 | 12 | 400 | 22 | 375 | 780  | 0,60                 | 0,60          | 223,0        |