



STOP VALVE

467102

PN 16

No	Part	Material
1	Body	Nodular cast iron GGG40.3
2	Bonnet	Nodular cast iron GGG40.3
3	Seat ring	Bronze Rg5
4	Disc	Bronze Rg5
5	Stem	Special brass
6	Handwheel	Cast iron
7	Glandpacking	Graphite
8	Gland	Nodular cast iron GGG40.3
9	Gasket	Teadit
10	Bolt/Nut	Steel, zincplated

Variants:


S.D.N.R. = Non-return disc

R = Parabolic disc

SS = Stainless steel trim

Various actuators

Other dimensions/materials on request

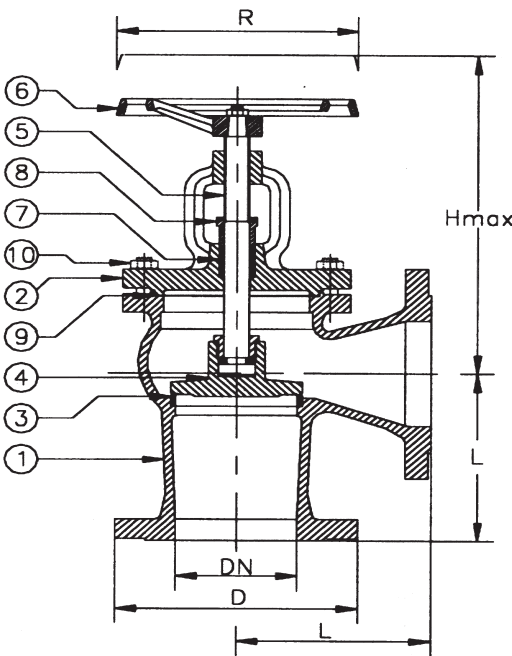

DN	D	n	Hcd	d	L	Hmax	Max working-pressure		Weight Kg
							Mpa 120 °C	Mpa 225 °C	
15	95	4	65	14	90	189	1,6	1,0	3,9
20	105	4	75	14	95	189	1,6	1,0	4,5
25	115	4	85	14	100	203	1,6	1,0	5,5
32	140	4	100	18	105	216	1,6	1,0	6,6
40	150	4	110	18	115	246	1,6	1,0	9,1
50	165	4	125	18	125	259	1,6	1,0	11,5
65	185	4	145	18	145	313	1,6	1,0	17,1
80	200	8	160	18	155	317	1,6	1,0	23,0
100	220	8	180	18	175	381	1,6	1,0	32,0
125	250	8	210	18	200	452	1,6	1,0	46,0
150	285	8	240	22	225	476	1,6	1,0	67,0
200	340	8	295	22	275	643	1,0	0,6	126,0
250	395	12	350	22	325	780	1,0	0,6	184,0
300	445	12	400	22	375	890	1,0	0,6	270,0