



STOP VALVE


467192

PN 16

No	Part	Material
1	Body	Stainless steel 1.4408
2	Bonnet	Stainless steel 1.4408
3	Disc	Stainless steel 1.4408
4	Stem	Stainless steel 1.4436
5	Handwheel	Cast iron
6	Glandel	Stainless steel 1.4408
7	Glandpacking	PTFE
8		
9		
10		

Variants:

S.D.N.R. = Non-return disc
R = Parabolic disc
PTFE-sealing
Various actuators
Other dimensions/materials on request

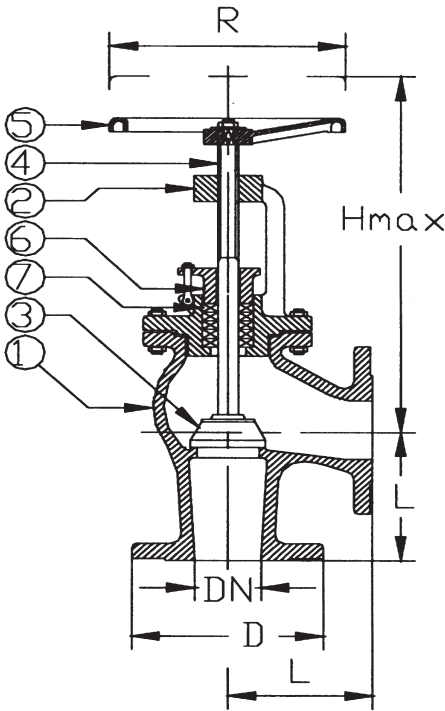

DN	D	n	Hcd	d	L	Hmax	Max working-pressure		Weight Kg
							Mpa 20 °C	Mpa 225 °C	
15	95	4	65	14	65	140	1,6	1,1	2,5
20	105	4	75	14	75	140	1,6	1,1	3,0
25	115	4	85	14	80	150	1,6	1,1	4,0
32	140	4	100	18	90	259	1,6	1,1	9,0
40	150	4	110	18	100	275	1,6	1,1	12,0
50	165	4	125	18	115	293	1,6	1,1	16,0
65	185	4	145	18	145	356	1,6	1,1	22,0
80	200	8	160	18	155	390	1,6	1,1	27,0
100	220	8	180	18	175	452	1,6	1,1	44,0
125	250	8	210	18	200	522	1,6	1,1	70,0
150	285	8	240	22	240	578	1,6	1,1	93,0
200	340	8	295	22	300	683	1,6	1,1	178,0
250	495	12	350	22	365	757	1,6	1,1	275-,0